Complement
your purchase
with these
fine accessories
also from
GINGER®:

Towel Bars
Towel Rings
Toilet Tissue Holders
Hooks
Soap Dishes
Tumbler Holders
Toiletry Shelves
Grab Bars
Mirrors
Lights
Bud Vases
Hotel Shelves
Shower Curtain Rods
Soap & Bottle Baskets

Cabinet Hardware

GINGER

460-N Greenway Industrial Drive Fort Mill SC 29708

gingerco.com

EMPIRE

INSTALLATION INSTRUCTIONS

for


Lights #682

GINGER

f M P I R f Single Light

LIGHTS INSTALLATION INSTRUCTIONS

MODEL NO. 682

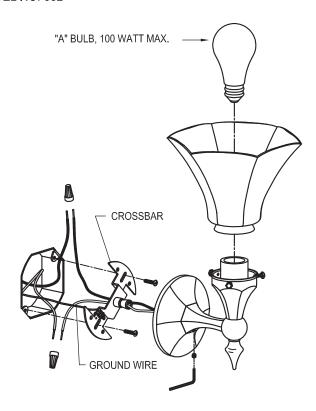

INSTALLATION INSTRUCTIONS:

THESE LIGHTS SHOULD BE INSTALLED BY A LICENSED CONTRACTOR

POWER REQUIREMENTS: 120 Volts, 60 Cycles

NOTE: Light can be installed inverted.

SAFETY: TO PREVENT ELECTRICAL SHOCK, BE SURE THAT THE POWER IS OFF BEFORE STARTING INSTALLATION.

INSTALLATION:

- PROVIDE THE REQUIRED WIRING TO THE WALL ELECTRICAL BOX. THE ELECTRICAL BOX SHOULD BE FLUSH TO THE WALL.
- 2. MOUNT CROSSBAR TO THE ELECTRICAL BOX. THE CROSSBAR SHOULD BE FLAT AGAINST THE WALL WITH THE SPINDLE FACING AWAY FROM THE WALL.
- 3. CONNECT HOUSE GROUND WIRE TO THE CROSSBAR WITH ATTACHED GROUNDING SCREW.
- 4. FEED THE FIXTURE WIRES THROUGH THE CENTER HOLE OF THE CROSSBAR,
- 5. CONNECT THE WHITE WIRE OF THE FIXTURE TO THE HOUSE NEUTRAL WIRE WITH A WIRENUT.
- CONNECT THE BLACK WIRE OF THE FIXTURE TO THE HOUSE HOT WIRE WITH A WIRENUT.
- SLIDE THE FIXTURE OVER THE SPINDLE OF THE CROSS-BAR UNTIL IT IS FLUSH
 AGAINST THE WALL. SECURE THE FIXTURE BY TIGHTENING THE SET SCREW
 WITH THE PROVIDED WRENCH. TAKE CARE WIRES ARE NOT PINCHED
 DURING THIS PROCESS.
- 8. POSITION GLASS SHADE ONTO FIXTURE AND CAREFULLY TIGHTEN THUMB SCREWS.
- 9. INSTALL LIGHT BULB.

