Features
- Two-piece design
- 12" rough-in
- Elongated bowl
- Choice of 0.8 gallon flush for liquid or light waste and 1.6 gallon flush for bulk or solid waste
- Dual Force flushing technology
- LEED-compliant

Recommended Products/Accessories
K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat
K-5588 Purefresh® Elongated Toilet Seat
K-4108 C3®-230 Elongated Cleansing Toilet Seat
K-5420 Low-Profile Bolt Caps

Included Components
Product consists of:
402026 Toilet Bowl
402022 Toilet Tank
Additional Components:
Bolt caps (pair)
Tank cover
tank hardware accessory pack
trip lever

WaterSense
Meets EPA Criteria
Certified by
IAPMO R&T

Codes/Standards
ASME A112.19.2/CSA B45.1
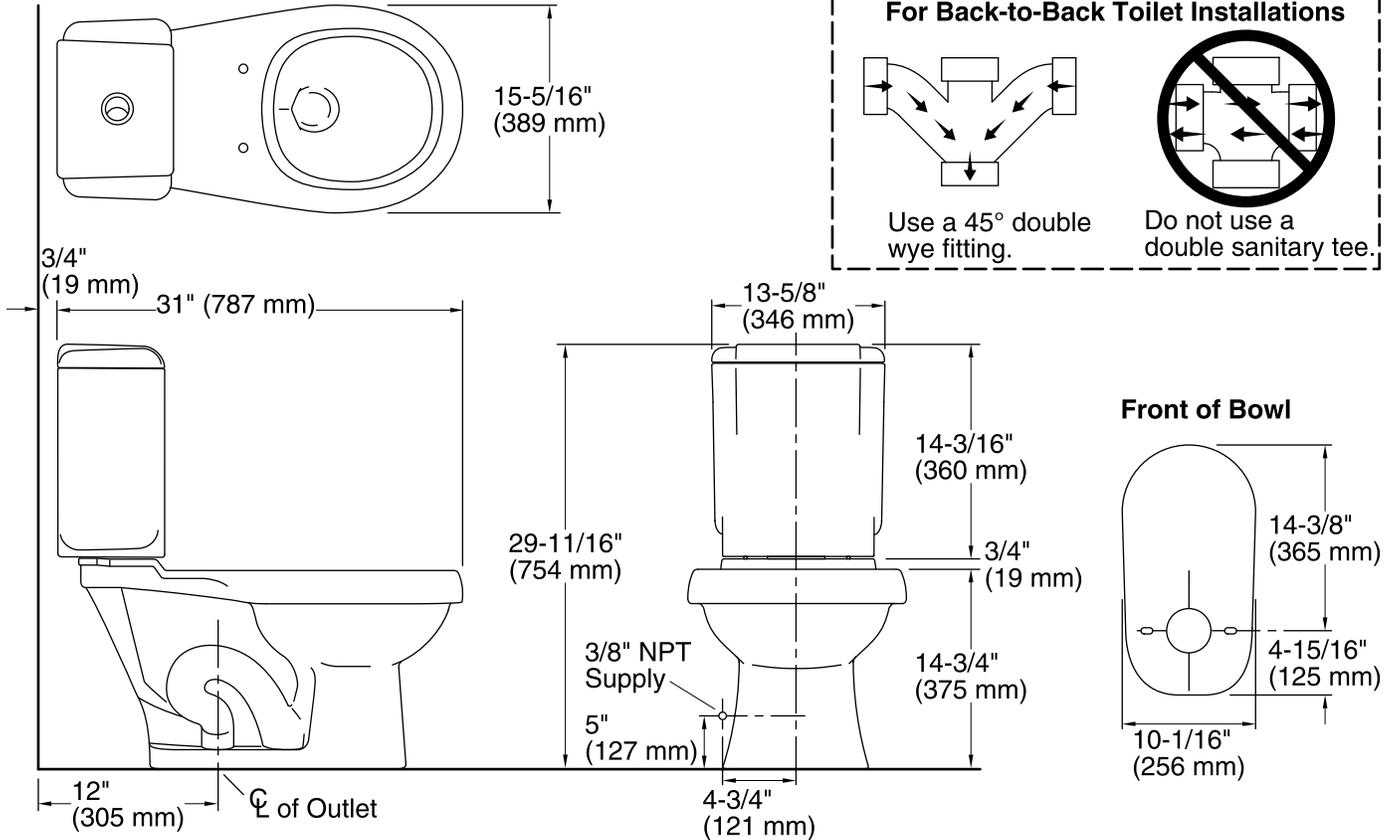DOE - Energy Policy Act 1992
EPA WaterSense®

STERLING® Warranty - Toilets and Lavatories
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	KOHLER Biscuit

1-800-STERLING (1-800-783-7546)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.sterlingplumbing.com.
4-25-2019 21:51 - US

For Back-to-Back Toilet Installations

Use a 45° double wye fitting.

Do not use a double sanitary tee.

15-5/16" (389 mm)

3/4" (19 mm)

31" (787 mm)

29-11/16" (754 mm)

12" (305 mm)

Ȼ of Outlet

13-5/8" (346 mm)

14-3/16" (360 mm)

3/4" (19 mm)

3/8" NPT Supply

5" (127 mm)

14-3/4" (375 mm)

4-3/4" (121 mm)

Front of Bowl

14-3/8" (365 mm)

4-15/16" (125 mm)

10-1/16" (256 mm)

Technical Information

All product dimensions are nominal.

Toilet type:	Two-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Trap passageway:	2-1/2" (64 mm)
Water Consumption	
Full:	1.6 gpf (6 lpf)
Reduced:	0.8 gpf (3 lpf)
Water surface size:	4-1/2" x 5-3/4" (114 mm x 146 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

Measure your actual product for roughing-in details.